

PTG500e Tide Gauge

PORTABLE TIDE GAUGE

FEATURES

- Specifically designed for tide measurement
- Simple & easy to use
- Used for many years in Australian Ports
- Excellent for use in remote locations
- Remote Software Updates
- Incorporates meteorological sensors
- Reprogrammable to suit customer requirements
- Interfaces to a wide range of acoustic, radar & pressure sensors
- Main & backup tide gauges can be used simultaneously
- Tide display & database software available
- High capacity internal non-volatile memory

APPLICATIONS

- Used in rivers, shipping channels, lakes or open ocean platforms for monitoring water level
- Records meteorological parameters, including temperature, pressure, humidity, wind speed, direction & wind gusts
- Used as a stand alone system in remote locations, or as part of a larger integrated network.
- In stand alone mode, data is continually stored to internal memory according to a logging schedule specified by the user and can later be downloaded during maintenance visits to site, or sent, in real time, via satellite, mobile or fixed line telecommunications.

TIDE GAUGE



water monitoring solutions




the PTG500e is a complete tide & meteorological monitoring station

As part of a larger network, the PTG500e can be used in conjunction with a communications link such as a radio modem, allowing real time monitoring for water level and weather of remote sites.

The PTG500e is used widely for large scale tide monitoring of ports and harbours. The Port of Melbourne Corporation monitors the critical Port Philip Bay shipping channel with a network of PTG500e units strategically placed around the bay.

ES&S can also supply the Tide and Meteorology Display System (TMDS). This Windows application automatically receives and displays data from a PTG500e network in real time, and creates a database of long term tide and meteorological data.

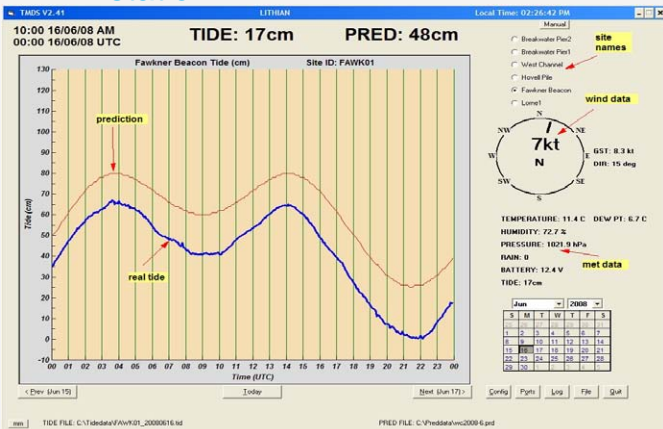

ISO 9001
CERTIFIED

CERTIFIED
QUALITY
MANAGEMENT SYSTEM
ISO 9001
CERTIFICATION N° 14383



TECHNICAL SPECIFICATIONS

PARAMETER	SPECIFICATION	NOTES
Tide Sensors	Acoustic (4-20mA or RS232)	1x RS232 & 1x 4-20mA can operate simultaneously
	Pressure (4-20mA)	
	Radar (4-20mA)	
Tide Range	0 - 5m	Standard sensor (SIEMENS)
	0 - 10m	Extended range sensor (SIEMENS)
Tide Accuracy	1mm	AQUATRAK
	1cm	Open air acoustic (Siemens, IMP)
Meteorological sensors	Temperature, Pressure, Humidity, Wind Speed & Direction, Rain	Vaisala WXT520
	Wind only	Vaisala WS420
	Any other 4-20mA or RS232 sensor	Consult factory for custom sensors
Power	Battery	11 – 16V
	Solar panel	65W typical (thru regulator)
	Mains	110 – 220Vac (adapter)
Internal flash memory <small>(no need for unreliable batteries)</small>	16MB std	3 minute recording of tide, temperature, humidity, pressure, wind speed, gust & direction
	Typically 1yr for full meteorological & tide data Option up to 92MB	
Timekeeping accuracy	+/- 1s	GPS locked
Averaging, Logging & Reporting	Average: 1 – 3600s	Implements NOS outlier rejection algorithm
	Reporting: 1 – 3600s	
	Logging: 1 – 3600s	
Output format	NMEA standard	Consult factory for custom formats
Communications	Interfaces to all standard modems	
Metadata transmission	Automatic at 00:00	
Setup and Configuration	Front panel alpha display & switches Remote terminal	
Connectors	Buccaneer environmental	
Size	240 x 160 x 90 mm	
Weight	1 kg	
Software update	Local or Remote	Laptop
		Console port

SENSORS AVAILABLE WITH PTG500e

<p>FOG SENSORS LUFFT VS20</p>  <p>VAISALA PWD</p> 	<p>HI ACCURACY LEVEL SENSOR AQUATRAK 5000 Series Sensor</p> <p>Waterproof connectors Watertight connectors</p>  	<p>ULTRASONIC LEVEL SENSORS PULSAR IMP SIEMENS</p>  
<p>CURRENT SENSORS TELEDYNE STARFLOW DOPPLER</p>  	<p>PRESSURE SENSORS DRUCK 1830 TYCO 1000</p>  	<p>RADAR SENSOR VEGAPLUS</p> 
		<p>WEATHER STATION LUFFT WS600 VAISALA WXT520</p>  